


## Refilling Your AquaMate

- 1) Separate the two halves of the filter by removing the 8 bolts, using hex wrench that came with original filter.
- 2) Remove the old FilterFoam Power Disk, leaving the black O ring in the bottom.
- 3) Rinse out the inside of the filter.
- 4) Make sure the black O ring is in place in the bottom and is smooth and flat, NOT crimped or twisted.
- 5) Insert the new Power Disk into the smaller section, on top toward the water inlet.
- 6) Reassemble the two halves of the filter by tightening the 8 bolts until the two halves are completely closed. Tighten the first bolt, then tighten the bolt across from it. (e.g. 12 o'clock and 6 o'clock).

Tighten the rest of the bolts in this manner, rather than starting at one bolt and tightening the bolt next to it. (You should NOT be able to see the seam between the halves.)  
HINT: It may be easier to tighten all bolts halfway first, then continue tightening until unit is tightly closed.

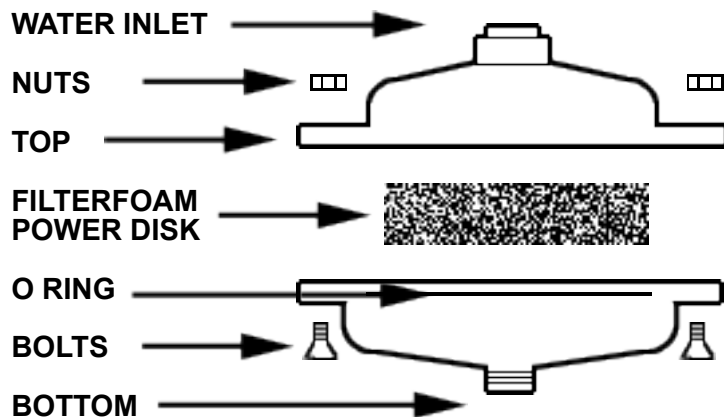


**AquaMate**  
featuring the Power Disk

## Refilling Your AquaMate

- 1) Separate the two halves of the filter by removing the 8 bolts, using hex wrench that came with original filter.
- 2) Remove the old FilterFoam Power Disk, leaving the black O ring in the bottom.
- 3) Rinse out the inside of the filter.
- 4) Make sure the black O ring is in place in the bottom and is smooth and flat, NOT crimped or twisted.
- 5) Insert the new Power Disk into the smaller section, on top toward the water inlet.
- 6) Reassemble the two halves of the filter by tightening the 8 bolts until the two halves are completely closed. Tighten the first bolt, then tighten the bolt across from it. (e.g. 12 o'clock and 6 o'clock).

Tighten the rest of the bolts in this manner, rather than starting at one bolt and tightening the bolt next to it. (You should NOT be able to see the seam between the halves.)  
HINT: It may be easier to tighten all bolts halfway first, then continue tightening until unit is tightly closed.

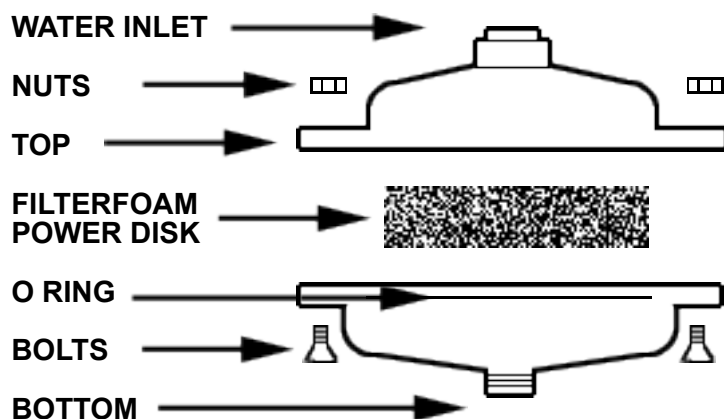


**AquaMate**  
featuring the Power Disk

## Refilling Your AquaMate

- 1) Separate the two halves of the filter by removing the 8 bolts, using hex wrench that came with original filter.
- 2) Remove the old FilterFoam Power Disk, leaving the black O ring in the bottom.
- 3) Rinse out the inside of the filter.
- 4) Make sure the black O ring is in place in the bottom and is smooth and flat, NOT crimped or twisted.
- 5) Insert the new Power Disk into the smaller section, on top toward the water inlet.
- 6) Reassemble the two halves of the filter by tightening the 8 bolts until the two halves are completely closed. Tighten the first bolt, then tighten the bolt across from it. (e.g. 12 o'clock and 6 o'clock).

Tighten the rest of the bolts in this manner, rather than starting at one bolt and tightening the bolt next to it. (You should NOT be able to see the seam between the halves.)  
HINT: It may be easier to tighten all bolts halfway first, then continue tightening until unit is tightly closed.

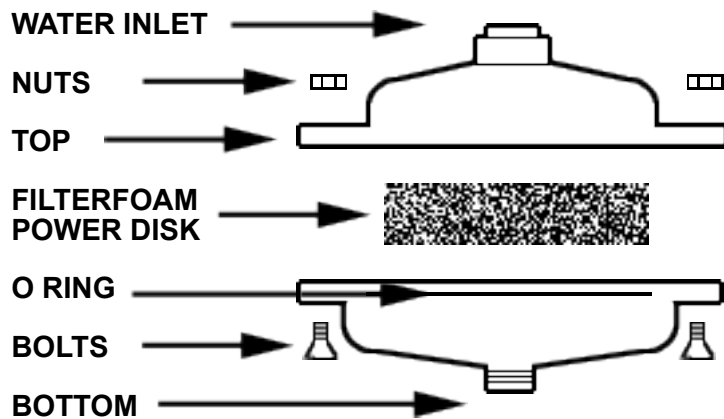

**AquaMate**  
featuring the Power Disk