



AquaMate

1-800-345-7873
www.cuzn.com

Standard Installation

- 1) Before starting, check all nuts and screws to make sure none have come loose during shipping. If loose, tighten with included allen wrench.
- 2) Screw filter onto water inlet prior to RV, Laundry, Garden.....
- 3) For AquaMate RV filter to work properly, a pressure reducer must be installed prior to the AquaMate filter.
- 4) Let Water run through the filter for 2 to 3 minutes before first use.
- 5) The filter must be used with incoming water that has a maximum temperature of 110 F and a maximum pressure of 100 psi. Do not allow filter to freeze. When storing position filter in a zipper type plastic bag to minimize evaporation.
- 6) Do not use the filter with integrated shut-off levers or controls. Backup pressure could cause the unit to split.

Refilling Your AquaMate


- 1) Separate the two halves of the filter by removing the 8 bolts, using hex wrench that came with original filter.
- 2) Remove the old FilterFoam Power Disk, leaving the black O ring in the bottom.
- 3) Rinse out the inside of the filter.
- 4) Make sure the black O ring is in place in the bottom and is smooth and flat, NOT crimped or twisted.
- 5) Insert the new Power Disk into the smaller section, on top toward the water inlet.
- 6) Reassemble the two halves of the filter by tightening the 8 bolts until the two halves are completely closed. Tighten the first bolt, then tighten the bolt across from it. (e.g. 12 o'clock and 6 o'clock).



Your AquaMate Contains

- | | |
|--------------------------------------|--|
| <input type="checkbox"/> KDF-55 disc | <input type="checkbox"/> Activated Carbon disc |
| <input type="checkbox"/> KDF-85 disc | <input type="checkbox"/> Catalytic Carbon disc |

**Keep this information to order
the correct refill for your TurboShower**

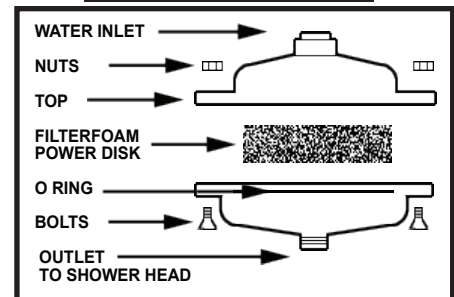

Limited Warranty

This CuZn filter is designed for use on potable systems only. Its effectiveness may be reduced in areas where municipally treated water has chemicals such as polyphosphates to alleviate water problems caused by high iron content. Do not use this filter in water supplies that may reach pressures over the recommended use stated on the instructions. The manufacturer warrants this product to be free from defects in materials and workmanship when installed, operated, and maintained in the manner instructed, for a period of one year from date of purchase. The warranty is limited to the repair or replacement of any filter that fails to perform due to faulty materials or workmanship during the warranty period. To qualify for this warranty, the filter must be maintained and replaced as stated in the instructions. Save your receipt. CuZn is not responsible for any damages occurring during the misuse of this product.

Max pressure 100 psi, Max temperature 110F



For information on other products please contact your distributor or visit
www.CuZn.com

Questions? Call
1-800-345-7873